


HOW TO REMOVE/INSERT THE SCREEN ON A SELF-STORING STORM DOOR

Screens are spring loaded and inserted in the door to ensure proper fit prior to shipping.

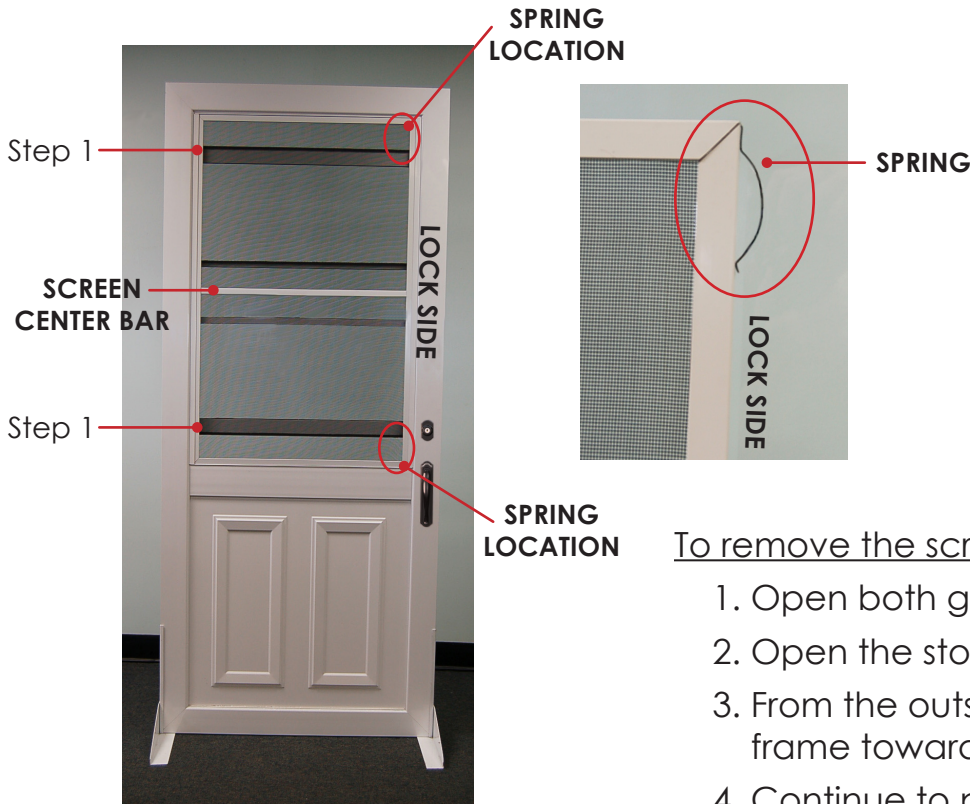

To remove the screen:

1. Open both glass panels to the first setting
2. Open the storm door
3. From the outside, carefully pull the screen frame towards the lock side.
4. Continue to pull the screen towards lock side until it pops out of hinge side.
5. Remove the screen.

To reinsert the screen:

1. Open both glass panels to the first setting
2. Open the storm door
3. The side of the screen with springs goes in first. From the outside face the springs towards the lock side. Slide it in to the lock side of the door.
4. When you have enough clearance on the opposite side (hinge side) snap in the screen
5. Release the lock side of the screen



www.hmidoors.com